


DA- P 20-130/ T



Technical Specifications:

Type:	DA- P 20-130/ T
Power:	20/10/5/2.5 W
Frequency Range:	150 - 20.000 Hz
SPL 1W/1m:	99,5 dB
SPL Pmax/1m:	112,5 dB
Dimensions:	140x195 mm
Temperature range:	-30 / +100 °C
Dispersion angle (-10dB):	360° (H) / 360° (V)
Weight:	1.35 kg
Packing Unit:	10
Protection Class:	
Fire Protection (DIN4102):	
Mounting:	Mounting plate
Connector:	5- adriges Kabel
Colour:	white

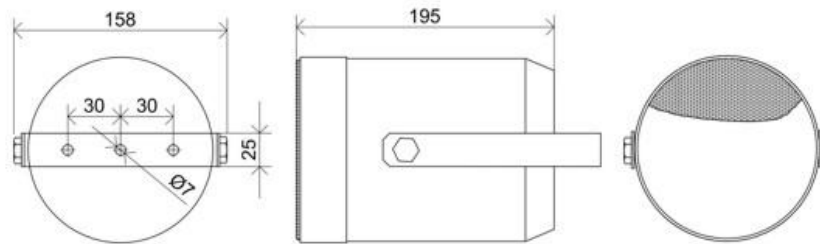


Product Attributes:




DA- P 20-130/ T

Frequency Diagrams:

Sound Pressure Level

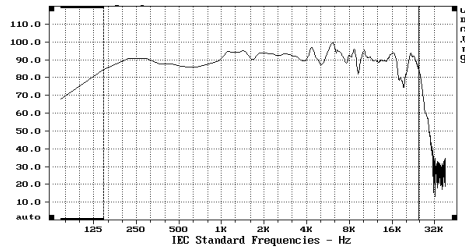


Impedance

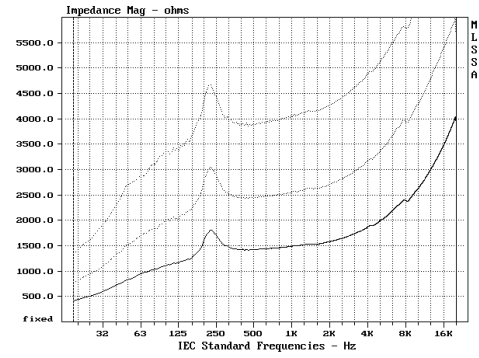


Polar Diagrams (H)


Kurven: -10dB/Einheit
 1: 250Hz/+82.9dB
 2: 250Hz/+82.9dB

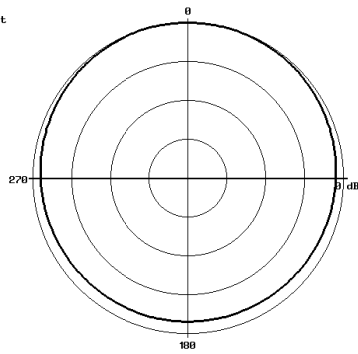


Kurven: -10dB/Einheit
 1: 1.00kHz/+86.6dB
 2: 1.00kHz/+86.6dB

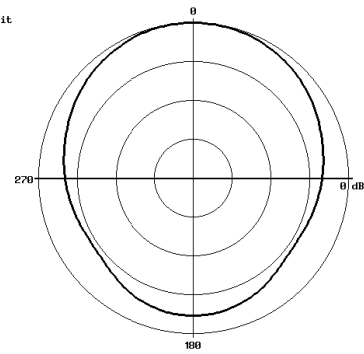

Kurven: -10dB/Einheit
 1: 4.00kHz/+91.1dB
 2: 4.00kHz/+91.1dB

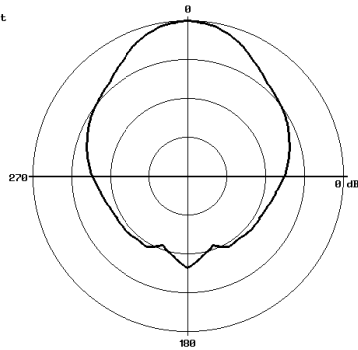

Kurven: -10dB/Einheit
 1: 16.00kHz/+88.6dB
 2: 16.00kHz/+88.6dB

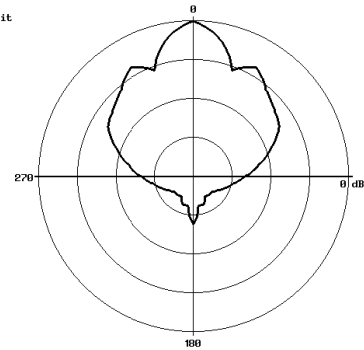


DA- P 20-130/ T


Frequency Diagrams:

Polar Diagrams (V)


Kurven: -10dB/Einheit
 1: 250Hz/+82.9dB
 2: 250Hz/+82.9dB

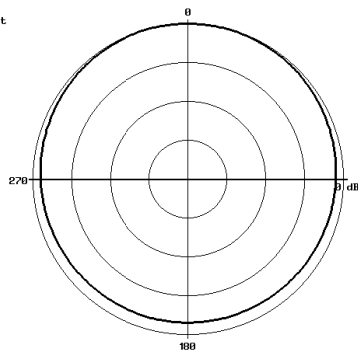


Kurven: -10dB/Einheit
 1: 1.00kHz/+86.6dB
 2: 1.00kHz/+86.6dB

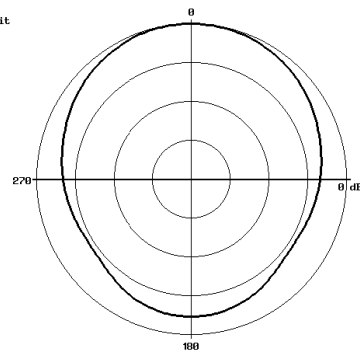

Kurven: -10dB/Einheit
 1: 4.00kHz/+91.1dB
 2: 4.00kHz/+91.1dB

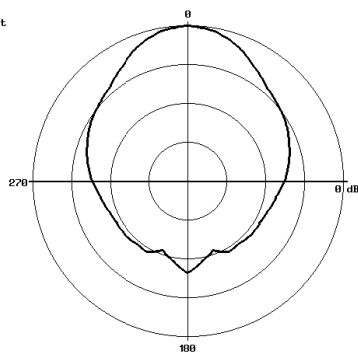

Kurven: -10dB/Einheit
 1: 16.00kHz/+88.6dB
 2: 16.00kHz/+88.6dB

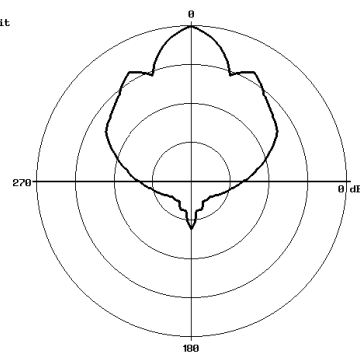

Measurements according to DIN IEC 268-5 | RoHS compliant (2002/95/ EG)